



Signal & Systems

Lecture #10

22nd May 18



Z-Transform

The Z-Transform

- ❖ The z-transform of a sequence $x[n]$ is: $X(z) = \sum_{n=-\infty}^{\infty} x(n)z^{-n}$
- ❖ The z-transform can also be thought of as an operator $Z\{.\}$ that transforms a sequence to a function:

$$Z\{x[n]\} = \sum_{n=-\infty}^{\infty} x[n]z^{-n} = X(z)$$

- ❖ In both cases z is a continuous complex variable.
- ❖ The z-transform operation is denoted as: $x(n) \xleftrightarrow{z} X(z)$
- ❖ Where “ z ” is the complex number. Therefore, we may write z as:


$$z = re^{j\omega}$$

The Z-Transform (cont.)

- ❖ Where r and ω belongs to Real number. When $r=1$, the z-transform of a discrete-time signal becomes:

$$X(e^{j\omega}) = \sum_{n=-\infty}^{\infty} x[n]e^{-j\omega n}$$

- ❖ Therefore, the DTFT is a special case of the z-transform.
- ❖ Pictorially, we can view DTFT as the z-transform evaluated on the unit circle:

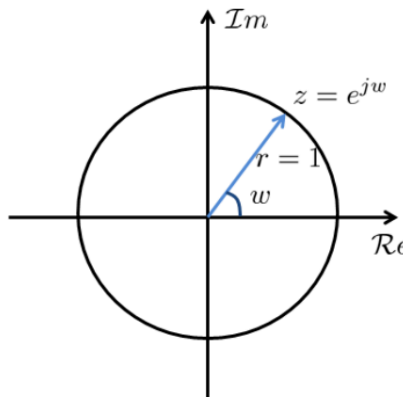

The Z-Transform (cont.)

- ❖ When $r \neq 1$, the z-transform is equivalent to:

$$\begin{aligned} X(re^{j\omega}) &= \sum_{n=-\infty}^{\infty} x[n](re^{j\omega})^{-n} \\ &= \sum_{n=-\infty}^{\infty} (r^{-n}x[n])e^{-j\omega n} \\ &= F[r^{-n}x[n]] \end{aligned}$$

- ❖ Which is the DTFT of the signal $r^{-n}x[n]$.
- ❖ However, we know that the DTFT does not always exist. It exists only when the signal is square summable, or satisfies the Dirichlet conditions.
- ❖ Therefore, $X(z)$ does not always converge. It converges only for some values of r . this range of r is called the region of convergence (ROC).



Region of Convergence (ROC)

- ❖ The region of convergence are the values of for which the z-transform converges.
- ❖ Z-transform is an infinite power series which is not always convergent for all values of z.
- ❖ Therefore, the region of convergence should be mentioned along with the z-transformation.
- ❖ The Region of Convergence (ROC) of the z-transform is the set of z such that X(z) converges, i.e.,

$$\sum_{n=-\infty}^{\infty} |x[n]| r^{-n} < \infty$$

Example #1

- ❖ Z-transform of right-sided exponential sequences.
- ❖ Consider the signal $x[n] = a^n u[n]$. Mathematically it can be written as:
$$x(n) = \begin{cases} a^n & \text{for } n \geq 0 \\ 0 & \text{for } n < 0 \end{cases}$$
- ❖ This sequence exists for positive values of n :

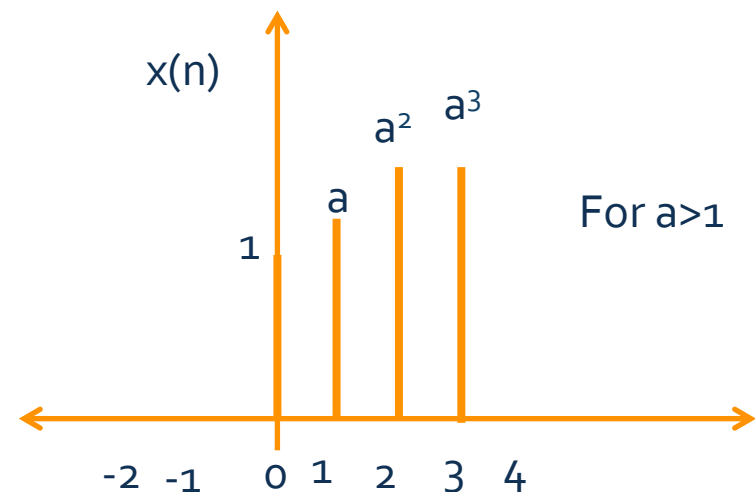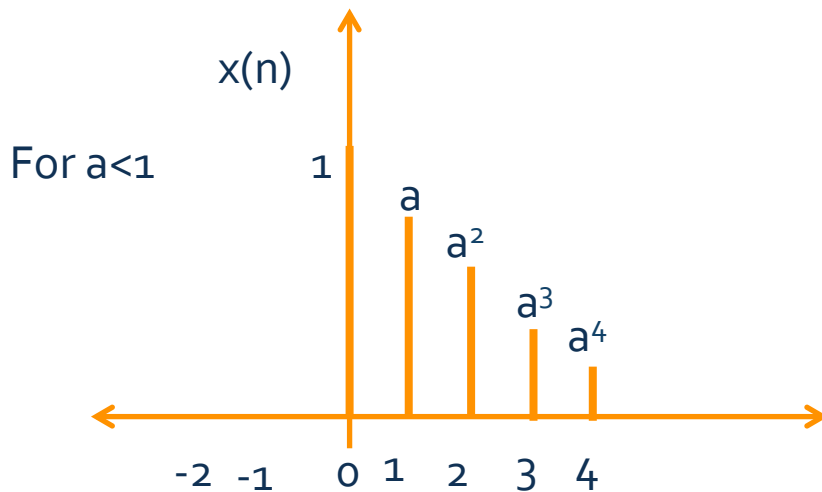

Example #1 (cont.)

❖ The z-transform of $x[n]$ is given by $X(z) = \sum_{n=-\infty}^{\infty} a^n u[n] z^{-n}$

$$= \sum_{n=0}^{\infty} (az^{-1})^n$$

❖ Therefore, $X(z)$ converges if $\sum_{n=0}^{\infty} (az^{-1})^n < \infty$. From geometric series, we know that:


$$\sum_{n=0}^{\infty} (az^{-1})^n = \frac{1}{1 - az^{-1}}$$

❖ When $|az^{-1}| < 1$, or equivalently $|z| > |a|$. So,

$$X(z) = \frac{1}{1 - az^{-1}}$$


Example #1 (cont.)

- ❖ With ROC being the set of z such that $|z| > |a|$. As shown below:

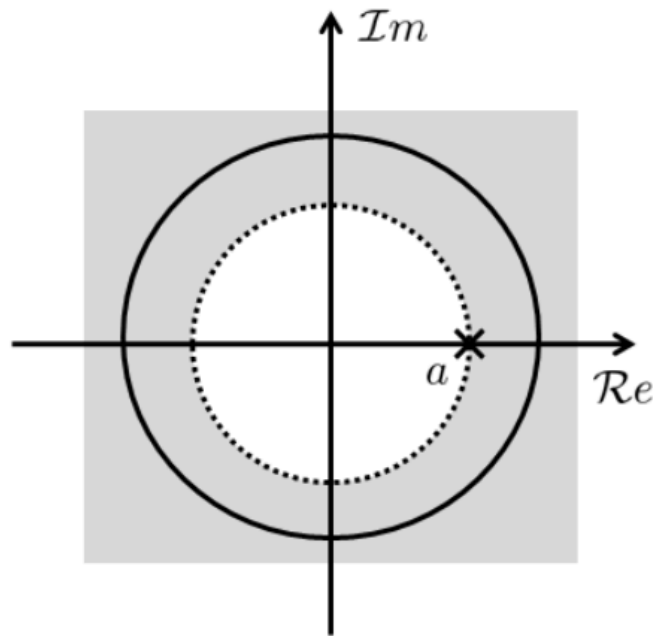

Example #2

- ❖ Consider the signal $x[n] = -a^n u[-n - 1]$ with $0 < a < 1$. Which is the left sided exponential sequence and it can be determined mathematically as:
$$x(n) = \begin{cases} -a^n u(-n - 1) & \text{for } n \leq 0 \\ 0 & \text{for } n > 0 \end{cases}$$
- ❖ This sequence exists only for negative values of n .

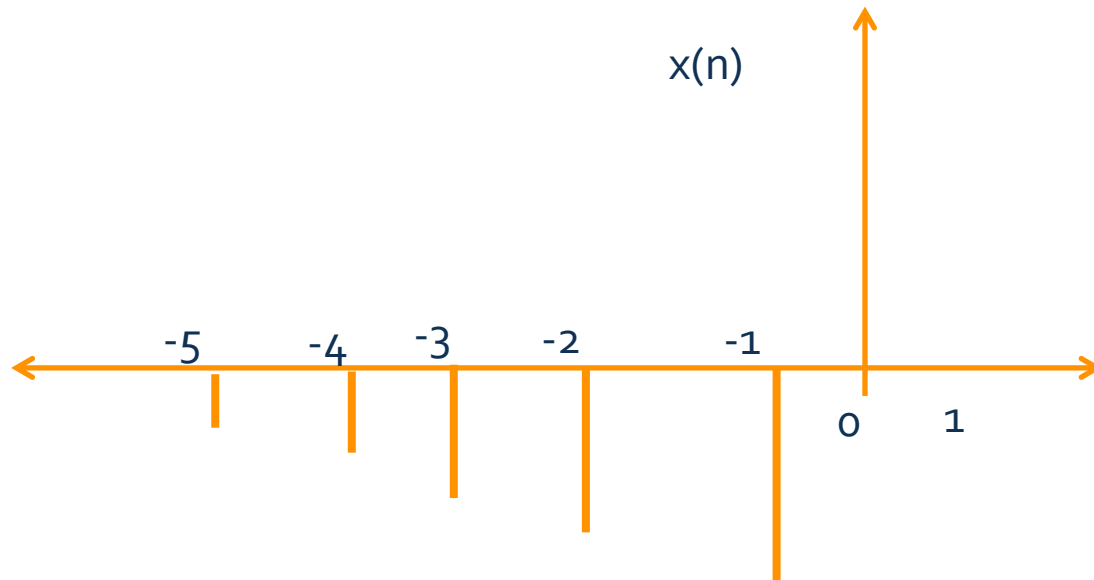

Example #2 (cont.)


❖ The z-transform of $x[n]$ is:
$$\begin{aligned} X(z) &= - \sum_{n=-\infty}^{\infty} a^n u[-n-1] z^{-n} \\ &= - \sum_{n=-\infty}^{-1} a^n z^{-n} \\ &= - \sum_{n=1}^{\infty} a^{-n} z^n \\ &= 1 - \sum_{n=0}^{\infty} (a^{-1}z)^n \end{aligned}$$

- ❖ Therefore, $X(z)$ converges when $|a^{-1}z| < 1$, or equivalently $|z| < |a|$. In this case:

$$X(z) = 1 - \frac{1}{1 - a^{-1}z} = \frac{1}{1 - az^{-1}}$$

Example #2 (cont.)

- ❖ With ROC being the set of z such that $|z| < |a|$.
- ❖ Note that the z -transform is the same as that of Example 1, the only difference is the ROC. Which is shown below as:

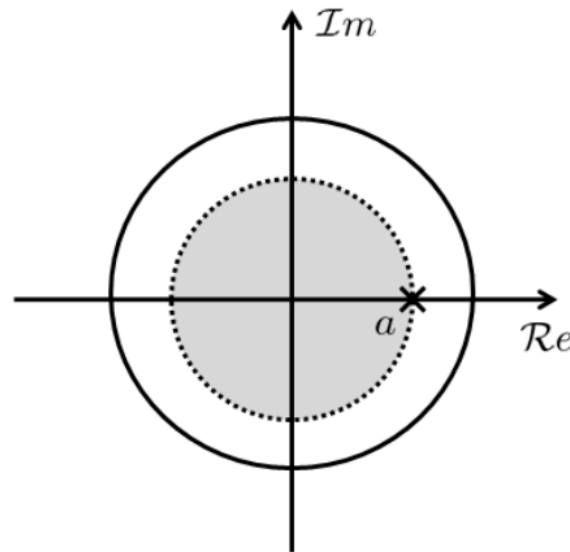

Properties of ROC



Properties of ROC

- ❖ **Property #1:** The ROC is a ring or disk in the z-plane center at origin.
- ❖ **Property #2:** The Fourier transform of $x|n|$ converges absolutely if and only if the ROC of the z-transform includes the unit circle.
- ❖ **Property #3:** The ROC contains no poles.
- ❖ **Property #4:** If $x|n|$ is a finite impulse response (FIR), then the ROC is the entire z-plane.
- ❖ **Property #5:** If $x|n|$ is a right-sided sequence then the ROC extends outwards from the outermost finite pole to infinity.

Properties of ROC

- ❖ **Property #6:** If $x[n]$ is left sided then the ROC extends inward from the innermost nonzero pole to $z=0$.
- ❖ **Property #7:** If $X(z)$ is rational, i.e., $X(z)=A(z) / B(z)$ where $A(z)$ and $B(z)$ are polynomials, and if $x[n]$ is right-sided, then the ROC is the region outside the outermost pole.



Properties of Z-Transform

Linearity

❖ This property states that if $x_1(n) \overset{z}{\longleftrightarrow} X_1(z)$ and $x_2(n) \overset{z}{\longleftrightarrow} X_2(z)$, then

$$a_1 x_1(n) + a_2 x_2(n) \overset{z}{\longleftrightarrow} a_1 X_1(z) + a_2 X_2(z)$$

❖ Where a_1 and a_2 are constants.

Time Scaling

- ❖ This property of z-transform states that if $x(n) \stackrel{z}{\longleftrightarrow} X(z)$, then we can write:

$$x(n - k) \stackrel{z}{\longleftrightarrow} z^{-k} X(z)$$

- ❖ Where k is an integer which is shift in time in $x(n)$ in samples.

Scaling in Z-Domain

- ❖ This property states that if:

$$x(n) \stackrel{z}{\longleftrightarrow} X(z) \quad ROC : r_1 < |z| < r_2$$

$$\text{then } a^n x(n) \stackrel{z}{\longleftrightarrow} X\left(\frac{z}{a}\right) \quad ROC : |a|r_1 < |z| < |a|r_2$$

- ❖ Where a is a constant.

Time Reversal

- ❖ This property states that if:

$$x(n) \xleftrightarrow{z} X(z) \quad ROC: r_1 < |z| < r_2$$

- ❖ Then,

$$x(-n) \xleftrightarrow{z} X(z^{-1}) \quad ROC: \frac{1}{r_1} < |z| < \frac{1}{r_2}$$

Differentiation in Z-Domain

❖ This property states that if $x(n) \stackrel{z}{\longleftrightarrow} X(z)$, then:

$$nx(n) \stackrel{z}{\longleftrightarrow} -z \frac{d\{X(z)\}}{dz}$$

Convolution

❖ This property states that if $x_1(n) \xleftrightarrow{z} X_1(z)$ and $x_2(n) \xleftrightarrow{z} X_2(z)$ then:

$$x_1(n) * x_2(n) \xleftrightarrow{z} X_1(z) X_2(z)$$

Example #3

- ❖ Find the convolution of sequences: $x_1 = \{1, -3, 2\}$ and $x_2 = \{1, 2, 1\}$
- ❖ Solution:
- ❖ Step 1: Determine z-transform of individual signal sequences:

$$\begin{aligned} X_1(z) &= Z[x_1(n)] = \sum_{n=0}^2 x_1(n)z^{-n} = x_1(0)z^0 + x_1(1)z^{-1} + x_1(2)z^{-2} \\ &= 1z^0 - 3z^{-1} + 2z^{-2} = 1 - 3z^{-1} + 2z^{-2} \end{aligned}$$

$$\begin{aligned} \text{and } X_2(z) &= Z[x_2(n)] = \sum_{n=0}^2 x_2(n)z^{-n} = x_2(0)z^0 + x_2(1)z^{-1} + x_2(2)z^{-2} \\ &= 1z^0 + 2z^{-1} + 1z^{-2} = 1 + 2z^{-1} + 1z^{-2} \end{aligned}$$

Example #3 (cont.)

- ❖ Step 2: Multiplication of $X_1(z)$ and $X_2(z)$:

$$\begin{aligned} X(z) &= X_1(z)X_2(z) = (1 - 3z^{-1} + 2z^{-2})(1 + 2z^{-1} + 1z^{-2}) \\ &= 1 - z^{-1} - 3z^{-2} + z^{-3} + 2z^{-4} \end{aligned}$$

- ❖ Step 3: Let us take inverse z-transform of $X(z)$:

$$x(n) = IZT \left[1 - z^{-1} - 3z^{-2} + z^{-3} + 2z^{-4} \right] = \{1, -1, -3, 1, 2\}$$



Inverse Z-Transform

Inverse Z-Transform

- ❖ The inverse Z-transform is as follows:

$$x[n] = \frac{1}{2\pi j} \oint X(z) z^{n-1} dz$$

- ❖ Methods to obtain Inverse Z-transform:

- ❖ If $X(z)$ is rational, we can use expanding the rational algebraic into a linear combination of lower order terms and then one may use:

- ❖ If ROC is out of pole $z = a_i$:

$$X(z) = \frac{A_i}{1 - a_i z^{-1}} \rightarrow x[n] = A_i a_i^n u[n]$$

- ❖ If ROC is inside of $z = a_i$:

$$X(z) = \frac{A_i}{1 - a_i z^{-1}} \rightarrow x[n] = -A_i a_i^n u[-n - 1]$$

- ❖ Do not forget to consider ROC in obtaining inverse of ZT.

Inverse Z-Transform (cont.)

- ❖ If $X(z)$ is non-rational, use Power series expansion of $X(z)$, then apply $\delta[n+n_0] \leftrightarrow z^{n_0}$
- ❖ If $X(z)$ is rational, power series can be obtained by long division.
- ❖ If $X(z)$ is a rational function of z , i.e., a ratio of polynomials, we can also use partial fraction expansion to express $X(z)$ as a sum of simple terms for which the inverse transform may be recognized by inspection.
- ❖ The ROC plays a critical role in this process.

Example #4

❖ Consider the z-transform:

$$X(z) = \frac{3 - \frac{5}{6}z^{-1}}{\left(1 - \frac{1}{4}z^{-1}\right)\left(1 - \frac{1}{3}z^{-1}\right)}, |z| > \frac{1}{3}$$

Example #5

❖ Consider:

$$X(z) = \frac{1}{1 - az^{-1}}, |z| > |a|$$

❖ Expand in a power series by long division.



Thank You!