

Signal & Systems

Lecture # 1

17th September 18

Engr. Sadaf Sufwan

Sadaf.malik88@gmail.com

www.sadafsufwan.com

Course Assessment

- Total assessment 100%
 - Midterm: 30%
 - Final Exam: 50%
 - Internal Evaluation: 20%
- Internal Evaluation 20%
 - Quizzes: 10%
 - Assignments: 10%

Internal Evaluation Details


- Total Quizzes 5
Best of 4 Quizzes
- Total Assignments 5
Best of 4 Assignments
- Semester Project will be conducted in the form of groups.
 - Evaluation will be equal to 1 quiz and 1 assignment
 - Hence, total 5 Quizzes and 5 Assignments.

Course Book

- Signal & Systems, By Alan V. Oppenheim, Alan S. Willsky with S.Hamid Nawab

Introduction

Signal & System

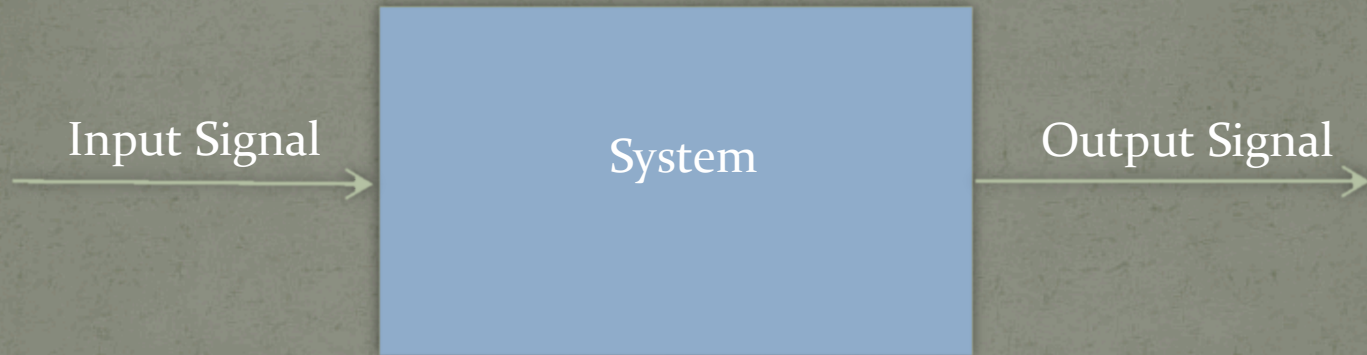

What is a Signal?

- If a function represents a physical quantity or variable containing information about the behavior and nature of the phenomenon.
- Signals are functions of one or more variables.

Examples of Signals

- Examples of signals include:
 - **A Voltage signal:** voltage across two points varying as a function of time.
 - **A photograph:** color and intensity as a function of 2-dimensional space.
 - **A Video Signal:** color and intensity as a function of 2-dimensional space and time.

What is a System?

- Systems are operator that accept a given signal (the input) and produces a new signal (the output).
- Systems respond to an input signal by producing an output signal.

Examples of Systems

- Examples of system includes:
 - **An Oscilloscope:** takes in a voltage signal, outputs a 2-dimensional image characteristic of the voltage signal.
 - **A computer monitor:** inputs voltage pulses from the CPU and outputs a time varying display.
 - **A capacitance:** terminal voltage signal may be looked at as the input, current signal as the output.


Classifications of Signals

Classification

- Two main broad classification of signals are:
 - Continuous time signal
 - Discrete time signal

Continuous Time Signals

- A signal which is defined for all values of t is known as Continuous time signal.
- A continuous time signal is an infinite and uncountable set of numbers.
- There are infinite possible values from the time t and instantaneous amplitude $x(t)$ between start and end point.




Exponential Function

- This signal is continuous in time as well as in amplitude.

Discrete Time Signals

- A signal which is defined only at distinct intervals of time is known as Discrete time signal.
- In a Discrete time signal the number of elements in the set as well as the possible values of each element is finite and countable.
- It can be represented with computer bits and stored on a digital storage medium.

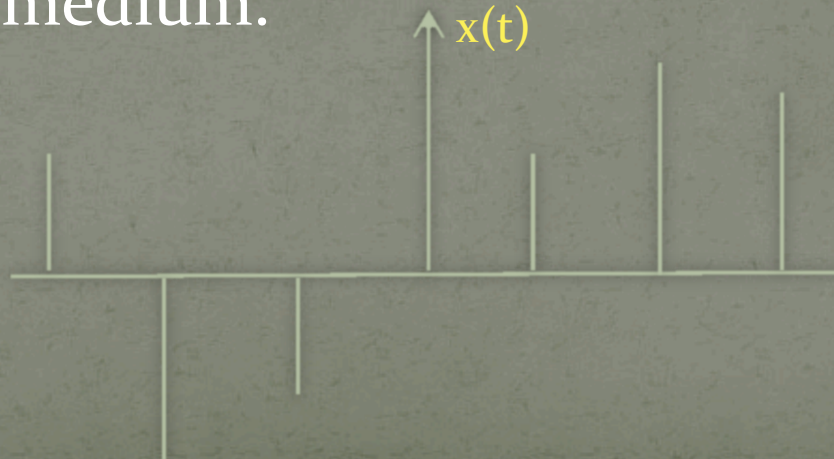

Basic Operations on Signals

Elementary Operations on Signals

- There are several basic operation by which new signals are formed from given signals:
 - Amplitude Scale: $y(t) = ax(t)$, where a is a real (or possibly complex) constant.
 - Amplitude Shift: $y(t) = x(t) + b$, where b is a real = (or possibly complex) constant
 - Addition: $y(t) = x(t) + z(t)$
 - Multiplication: $y(t) = x(t)z(t)$


Time Shift

- For any $t_0 \in R$ and $n_0 \in Z$ time shift is an operation defined as:

$$x(t) \rightarrow x(t - t_0)$$


$$x[n] \rightarrow x[n - n_0]$$

- If $t_0 > 0$, the time shift is known as “delay”.
- If $t_0 < 0$, the time shift is known as “advance”.
- For example:

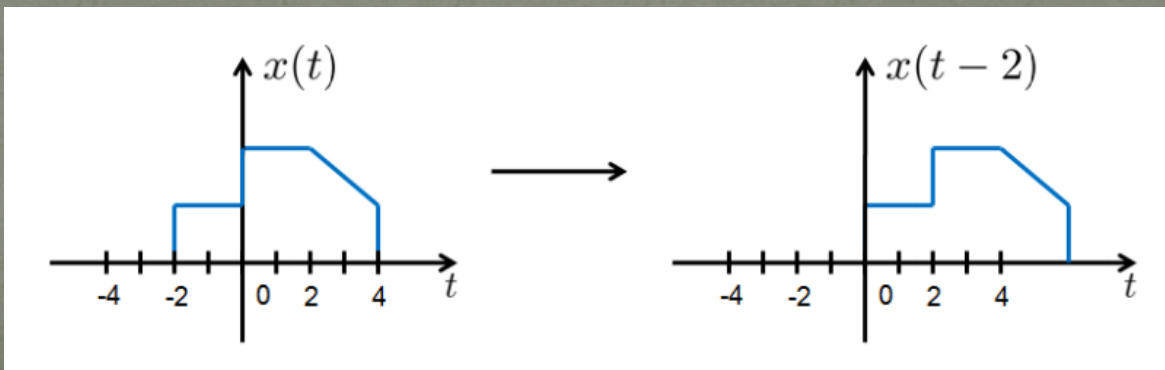

Time Reversal

- Time reversal is defined as: $x(t) \rightarrow x(-t)$
 $x[n] \rightarrow x[-n]$
- Which can be interpreted as the “flip over the y-axis”.
- For example:

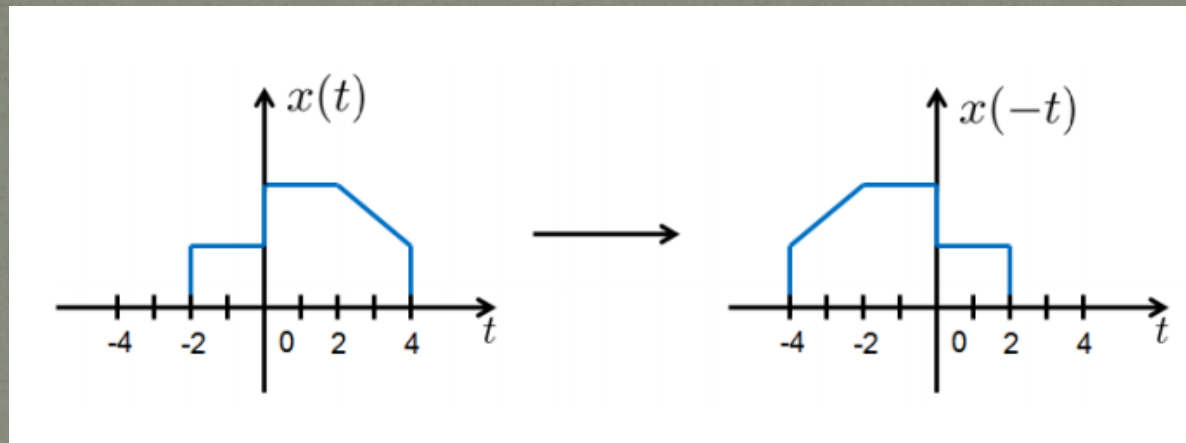


Time Scaling

- Time scaling is the operation where the time variable t is multiplied by a constant a :

$$x(t) \rightarrow x(at), \quad a > 0$$

- If $a > 1$, the time scale of the resultant signal is “decimated” (speed up).
- If $0 < a < 1$, the time scale of the resultant signal is “expanded” (slowed down).
- For example:

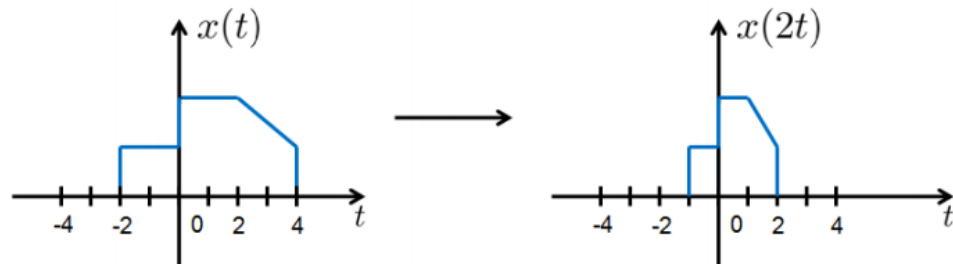


Time Compression

- Time compression is also known as decimation or down sampling.
- When $|a| > 1$, we will have time scaling of discrete signal as time compression.
- For Example: when $a=2$, then above condition is satisfied.

$$x[n] \rightarrow x[2n], \quad |a| > 1$$

- Signal will compress.

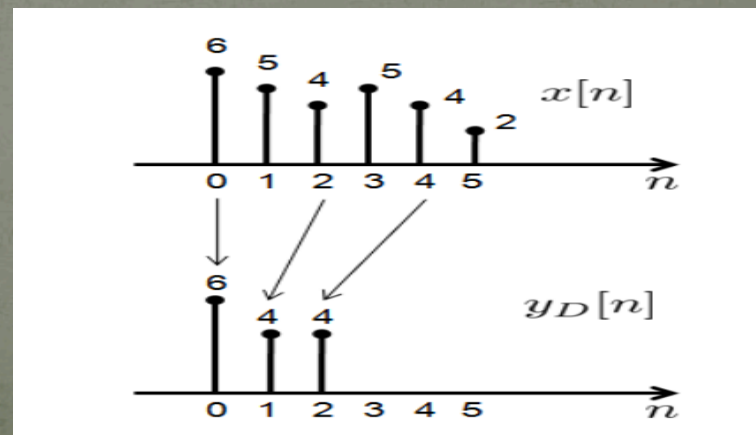


Time Expansion

- Time expansion is also known as interpolation or up sampling.
- Expansion is defined as:

$$y_E[n] = \begin{cases} x\left[\frac{n}{L}\right], & n = \text{integer multiple of } L \\ 0, & \text{otherwise} \end{cases}$$

- L is called the expansion factor.
- When L=2.

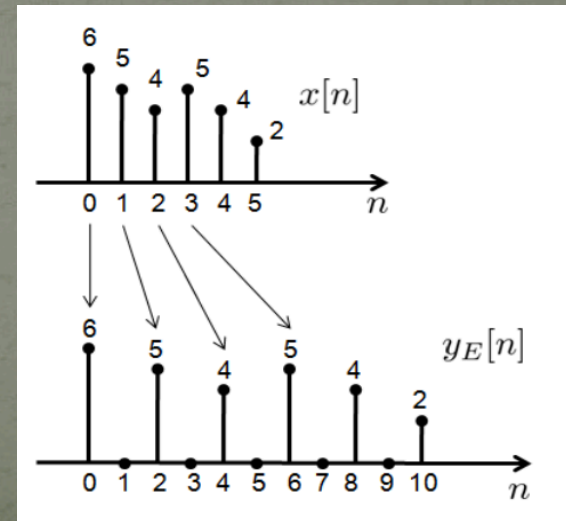

Combination of Operations


- Linear operation in time on a signal $x(t)$ can be expressed as:

$$y(t) = x(at - b), \quad a, b \in R$$

- There are two methods to describe the output signal:
 - **Method A: “shift, then scale”**
 - Define $v(t) = x(t-b)$
 - Define $y(t) = v(at) = x(at-b)$
 - **Method B: “Scale, then shift”**
 - Define $v(t) = x(at)$
 - Define $y(t) = x(t-b/a) = x(at-b)$

Combination of Operations (cont.)

- Example #1:

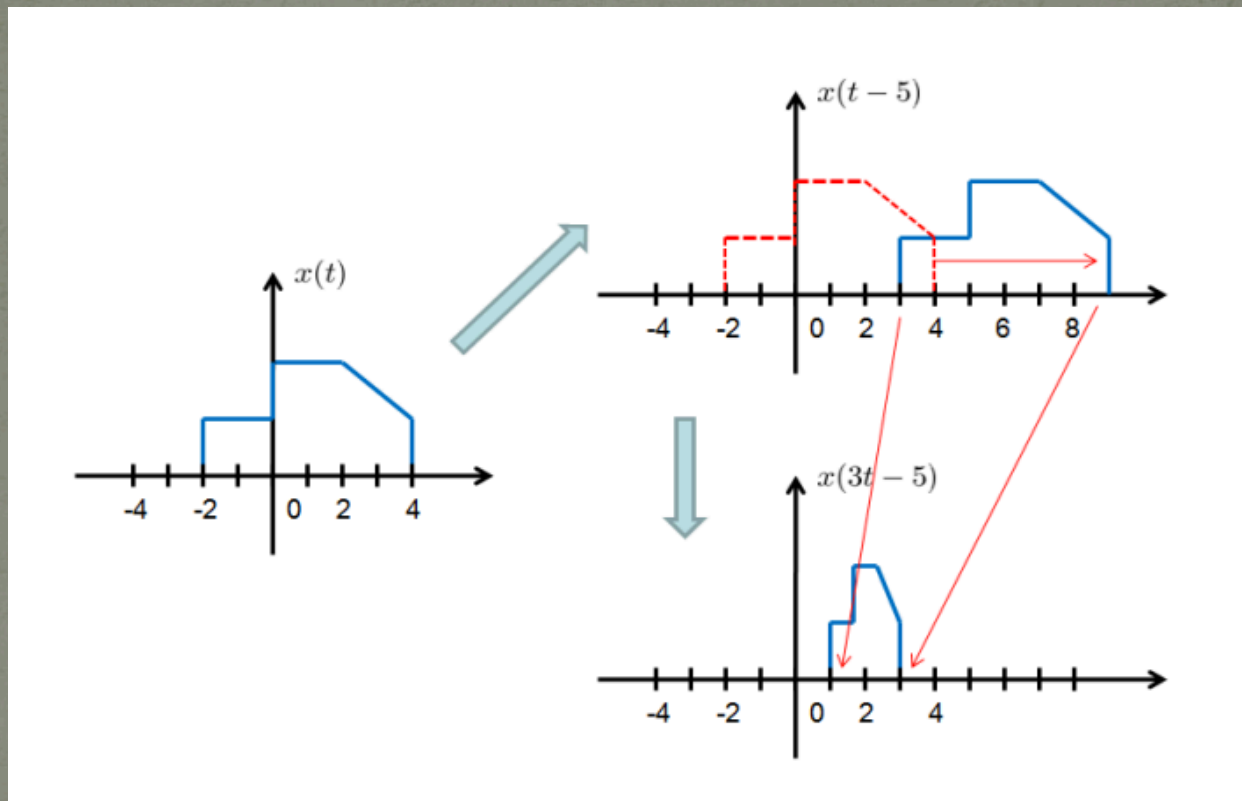

Combination of Operations (cont.)

- Example #2:

$$x[n] = \{1, 2, 3, 4, 5\}$$

$$\textit{Find } y[n] = x[2n - 1]$$

The End
